



DATA SHEET

LC-TCP/IP Interface

LC-TCP/IP



The LC-TCP/IP interface is used with our Head End PC software or when an Emergency Monitoring system is required. The Network Controller also provides backbone communications with DALI LCMs and DALI Gateways which can be connected using a dedicated CAT5 cable or over a shared LAN.

The Network Controller provides over-ride facilities for key switch commands; standard functions provide an 'Emergency Test' and an 'Over-ride All On'.

IMPORTANT: The information contained in this data sheet is subject to change at any time without notice

Lighting Controls Ltd.
5 Bourne Mill Business Park
Guildford Road,
Farnham,
Surrey, GU9 9PS


Tel: 01252 470027
Fax: 01252 782288

Email: info@lightingcontrols.ltd.uk
Website: www.lightingcontrols.ltd.uk



TECHNICAL SPECIFICATIONS

Supply Voltage	90-230 V AC
Power consumption	2W
Input	4 Volt-free 24 virtual inputs, configurable via Head-End software
Ethernet	10/100 base via RJ45
CAN bus connector	Screw terminal
TCP/IP Configuration	External DHCP

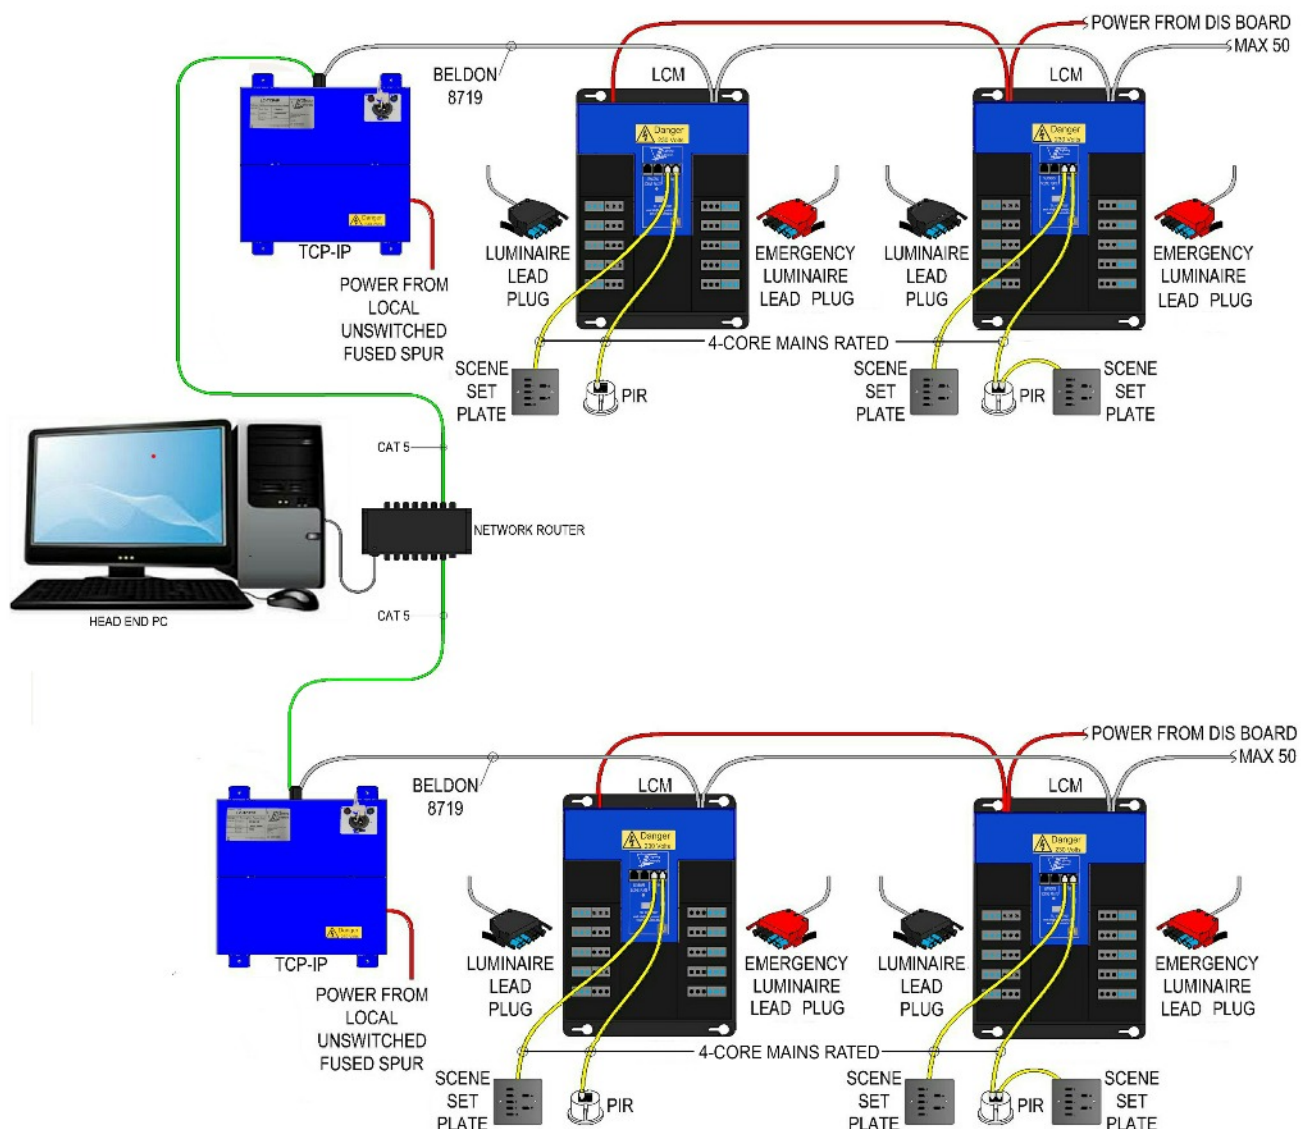

The TCP/IP interface provides backbone communications over CAT5 cable between the Head End controller and DALI LCMs and Gateways.

IMPORTANT: The information contained in this data sheet is subject to change at any time without notice

5 Bourne Mill Business Park, Guildford Road, Farnham, Surrey, GU9 9PS, U.K.

Tel: 01252 470027 Fax: 01252 782288 www.lightingcontrols.ltd.uk