


ecoFLEX 3 & 5 Pole Armoured Lighting/Power End

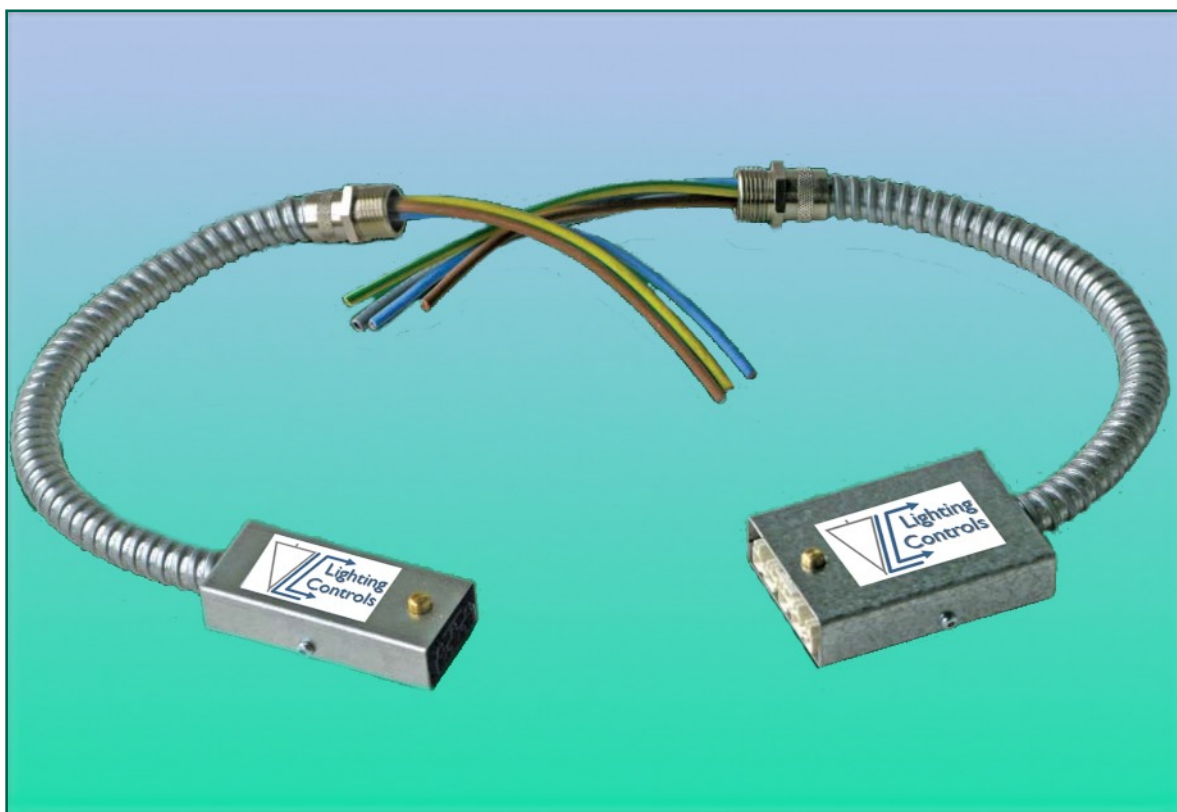

These **ecoFLEX** Armoured End Cables provide the final power and data at the end of a radial circuit, thus eliminating an open end on a lighting tee or fan coil unit.

Leads are supplied pre-wired, male to free end, in custom lengths to suit the installation. They are supplied as a 16mm² conduit pre-glanded to a metal housing in 2.5mm² 6491 B plus suitable 2-core bus cable in the 5 pole version.

For technical specifications please refer to the Technical Data for the Master Distribu-

tion Box.


Cables are typically supplied in the following format:

Armoured Power End Cable 3 Pole, 3-core, 4.0mm² 11 metre


Part no: LC-AWEC33411

Armoured Power End Cable 5 Pole, 5-core, 2.5mm² 11 metre

Part no: LC-AWEC53211/BS

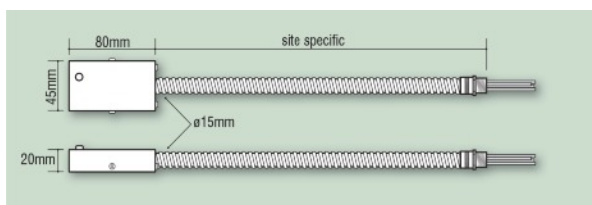

LC-AWEC33411

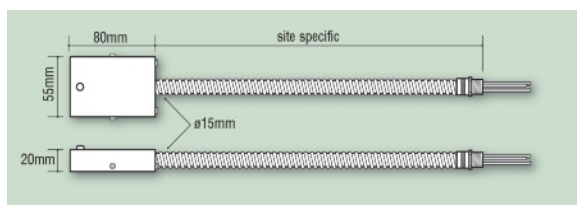

LC-AWEC53211/BS

Metal Housings: Bright Spangled Galv - BSEN10142:2000

Protection Class: IP20

Conduit: Galv - BSEN50086 **Current rating:** 25A **Voltage rating:** 400V/6kV/3.IEC60664

Manufactured to BS488

IMPORTANT: The information contained in this data sheet is subject to change at any time without notice