

LC-MB MARSHALLING BOX

Key Features

The modular design of the ecoLUX Marshalling Box makes it quick and easy to make changes in luminaire and PIR configuration. Ten luminaire outlets are provided, and connection is made via 6-pole GST connectors. The high impact-resistance, flame retardant ABS boxes provide a light, robust enclosure that can be easily mounted in any environment. This LCM has:

- 10 outputs which can be split into 2 groups of 5
- 16A max load at 240V (max. 6A per port)
- Dual fix
- Can be used in a DALI network
- Emergency test via switch

Our Marshalling Box has the ability to be supplied with two circuits.



Connections

10 x luminaire outputs via 6-way connectors which can be used as 2 banks of 5.


Other:

- Emergency: Maintained Live
- Max. Current: 16A, 6A per port, 230V AC

Luminaire plug part numbers

Black plug: 6PMPBB/B

Red (emergency) plug: 6PMPBB/R

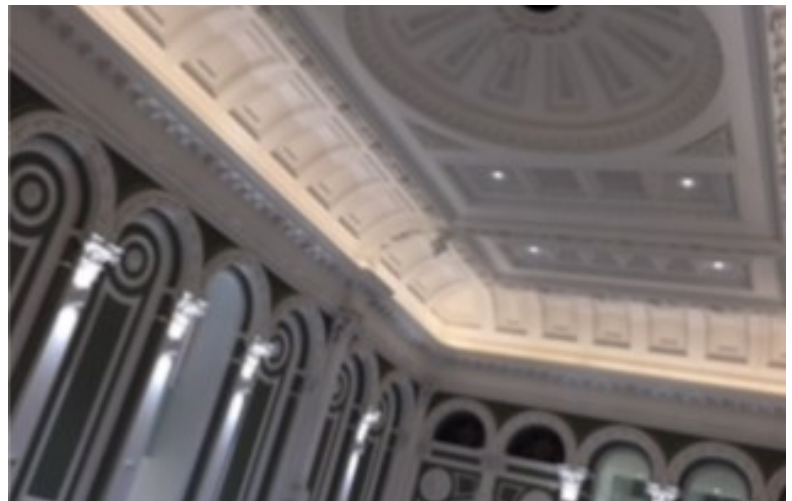

Custom Scene Plate installed on one of our sites, Wimbledon Bridge House (above).

