


ecoFLEX 5 Pole Armoured Lighting Interlink Cable

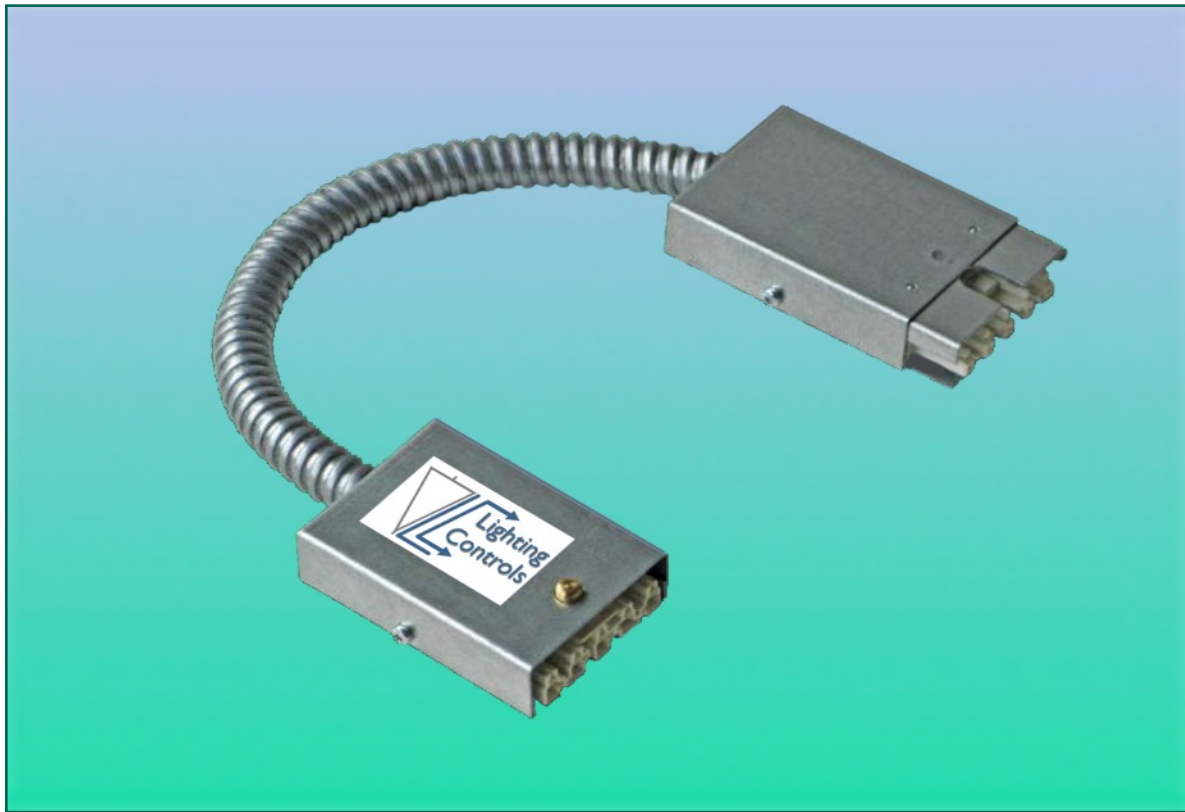


The **ecoFLEX** Armoured Lighting Interlink Cable is designed to provide a power and bus between point (A) and point (B) within the modular cabling, typically between a Master Distribution Box and a Flying Tee on a Lighting Control Module.

Leads are supplied pre-wired, male to female, in custom lengths to suit the installation. They are supplied as a 16mm² conduit

pre-glanded to a metal housing in 2.5mm² 6491 B plus suitable 2-core bus cable. For technical specifications please refer to the Technical Data for the Master Distribution Box.

Cables are typically supplied in the following format:

Armoured Lighting Cable 5 Pole, 3-core, 2.5mm + bus

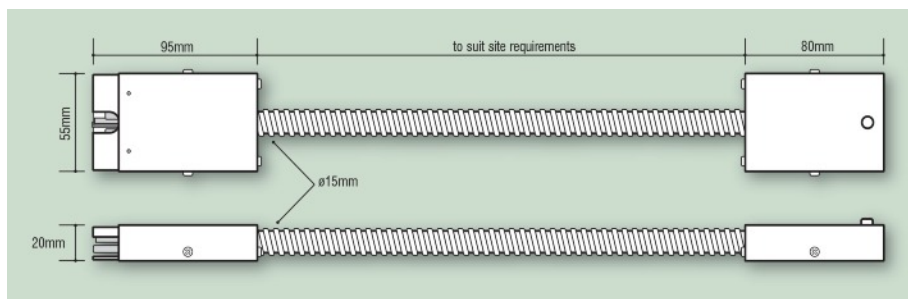

Metal Housings: Bright Spangled Galv - BSEN10142:2000

Protection Class: IP20

Conduit: Galv - BSEN50086 **Current rating:** 25A **Voltage rating:** 400V/6kV/3.IEC60664

Manufactured to BS8488

IMPORTANT: The information contained in this data sheet is subject to change at any time without notice