

ecoFLEX 3 Pole Power Interlink Cable



The **ecoFLEX** Armoured Lighting Interlink Cable provides a power and bus between point (A) and point (B) within the modular wiring, typically between a Master Distribution Box and a fan coil unit.


Leads are supplied pre-wired, male to female, in custom lengths to suit the installation. They are supplied as a 16mm² conduit pre-glanded to a metal housing in 4.0mm² 6491 B plus suitable 2-core bus cable.

For technical specifications please refer to the Technical Data for the Master Distribution Box.

Cables are typically supplied in the following format:

Armoured Power Interlink Cable 3 Pole, 3-core, 4.0mm + bus

Part no: LC-AWIC33405L/BS for a 5 metre lead

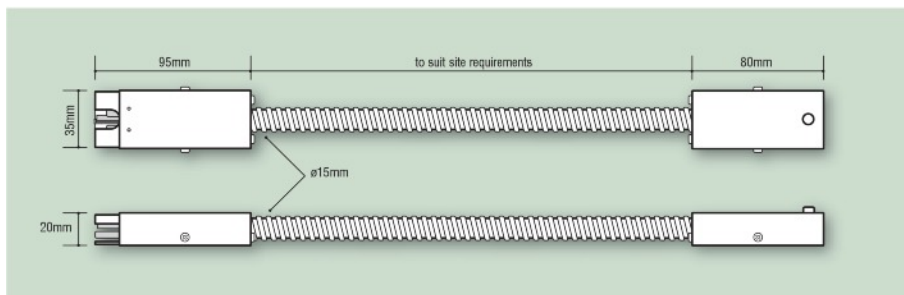

Metal Housings: Bright Spangled Galv - BSEN10142:2000

Protection Class: IP20

Conduit: Galv - BSEN50086 **Current rating:** 25A **Voltage rating:** 400V/6kV/3.IEC60664

Manufactured to BS8488

IMPORTANT: The information contained in this data sheet is subject to change at any time without notice