


## ecoFLEX 3 & 5 Pole Lighting/Power Starter Cable

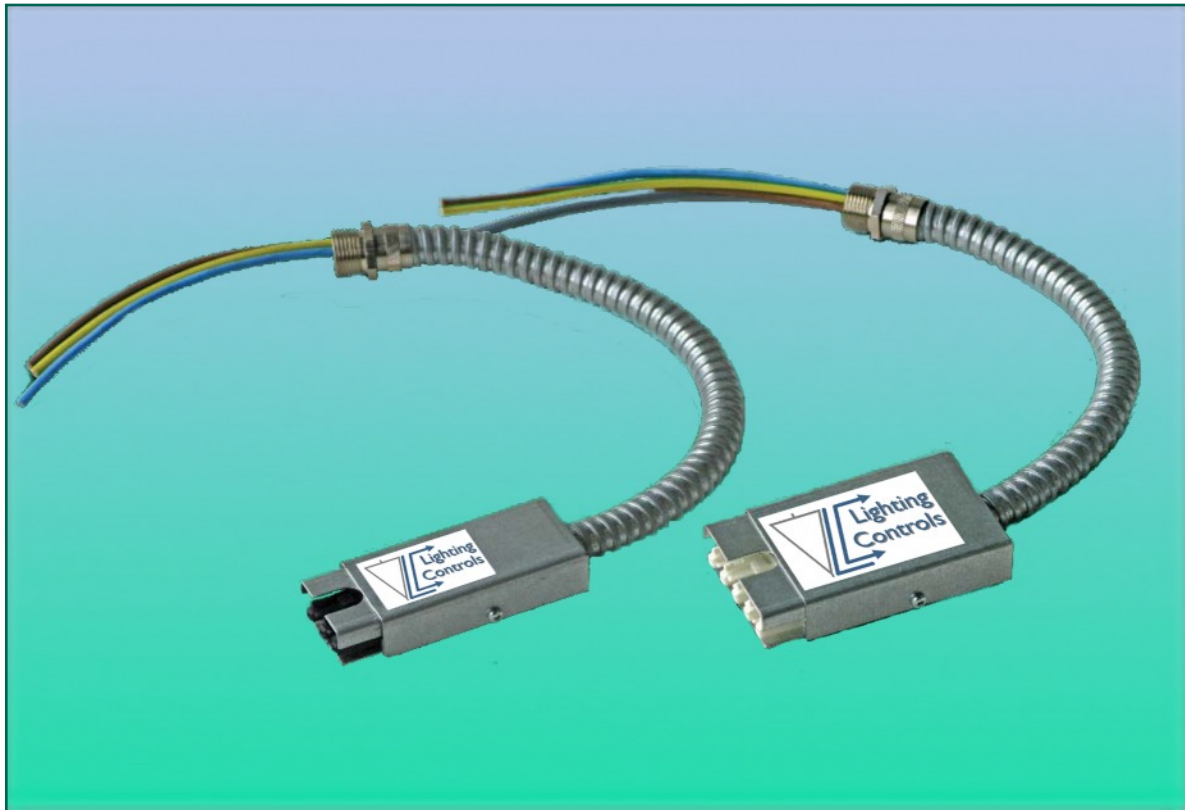

These **ecoFLEX** Armoured Starter Cables provide the start of a power and data supply to a circuit not connected to a Master Distribution Box. This provides a cost effective solution for single circuit supplies to a radial circuit.

Leads are supplied pre-wired, female to free end, in custom lengths to suit the installation. They are supplied as a 16mm<sup>2</sup> conduit pre-glanded to a metal housing in 2.5mm<sup>2</sup> for the lighting bus and 4.0mm<sup>2</sup> for power.

For technical specifications please refer to the Technical Data for the Master Distribution Box.


Cables are typically supplied in the following format:

*Armoured Power End Cable 3 Pole, 3-core, 4.0mm<sup>2</sup> 11 metre*


**Part no:** LC-AWSC33411

*Armoured Power End Cable 5 Pole, 5-core, 2.5mm<sup>2</sup> 11 metre*

**Part no:** LC-AWSC53211/BS

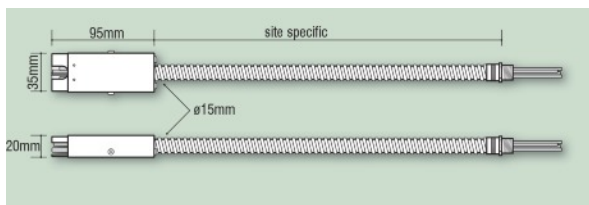

*LC-AWSC33411*

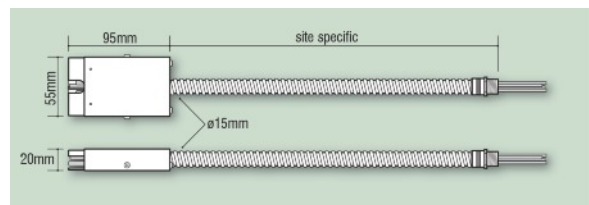

*LC-AWSC53211/BS*

**Metal Housings:** Bright Spangled Galv - BSEN10142:2000

**Protection Class:** IP20

**Conduit:** Galv - BSEN50086 **Current rating:** 25A **Voltage rating:** 400V/6kV/3.IEC60664

Manufactured to BS8488

**IMPORTANT:** The information contained in this data sheet is subject to change at any time without notice