


32A Underfloor Power Distribution

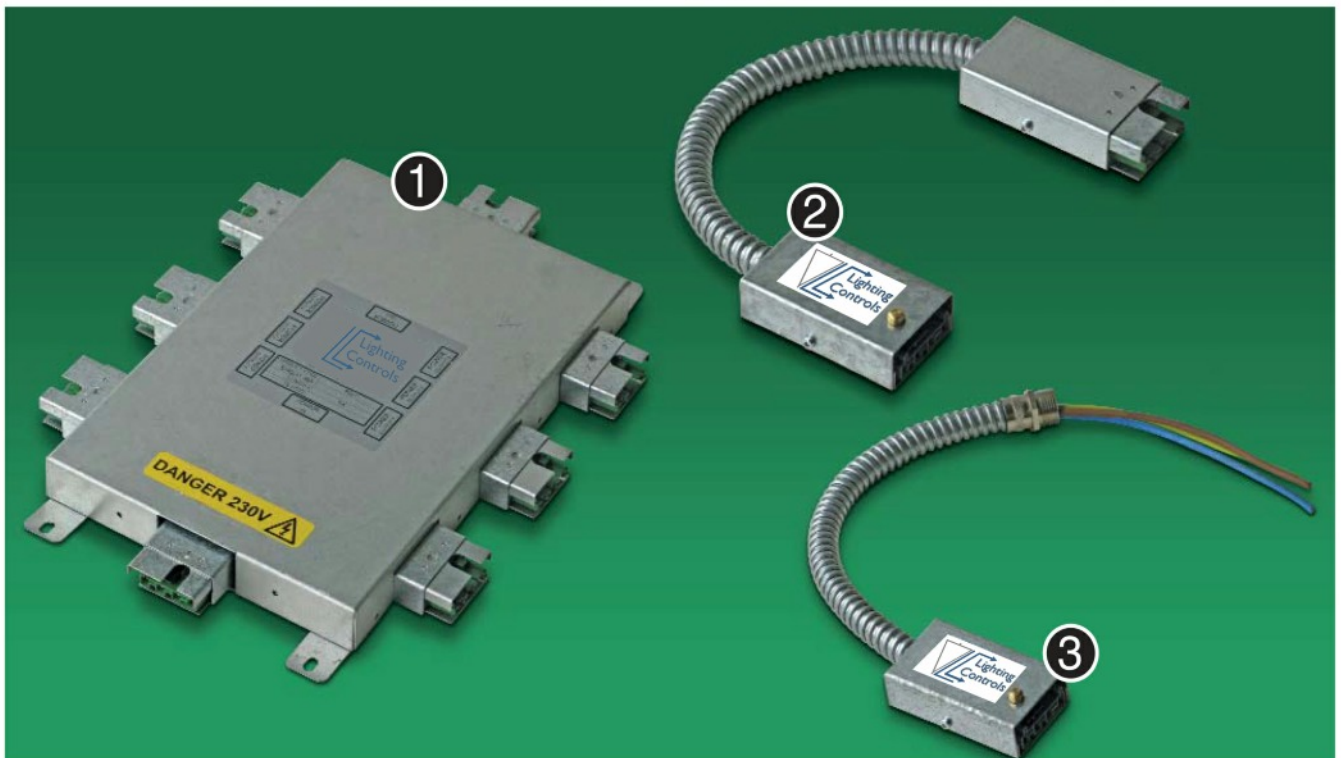

1. The Master Power Distribution unit (PDU) – 6 Port is supplied pre-wired with a home run cable or with a male and female 4 pole 32A connector system, the male connection on the PDU being the incoming connection from the power supply lead with a female starter 3 or 4 core 4.0mm² BASEC approved BS7211 LSOH 6491B cable.

Similarly the connection between PDU's can be plug and socket or pre-glanded to specific lengths.

The system is manufactured to comply with Section 607 as standard.

2. Power Interlink Cable 4 Pole


The **Armoured Power Interlink Cable** is designed to provide a power connection between two PDUs.

Leads are supplied as a pre-wired male to female 4 pole 3 or 4 core suitably sized LSOH cable and a typically supplied in lengths of 1 metre increments.

3. Armoured Power Tap Off

The **Armoured Tap Off** is manufactured using metal flexible conduit and fully shrouded plugs. Each type of armoured tap off is available with up to 4 cores of suitably sized LSOH cables. The leads are manufactured in lengths starting at 1 metre and increase in increments of 1 metre.

For technical specification please refer to the Technical Data on page 9.11

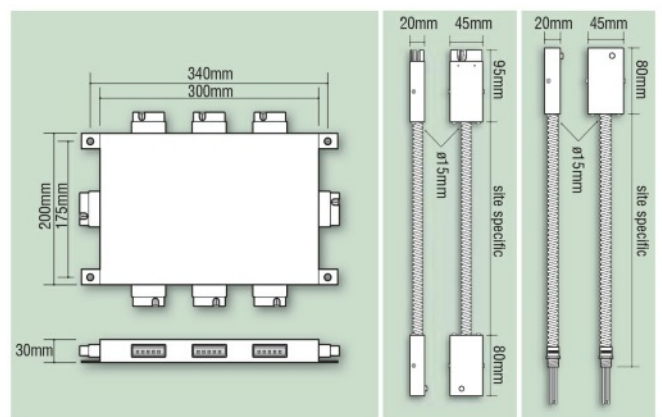

Metal Housings: **Bright Spangled Galv – BSEN10142:2000**
 Conduit: **Galv – BSEN50086** Current Rating: **32Amps**
 Manufactured to: **BS8488**

Protection Class: **IP20**
 Voltage Rating: **400V/6KV/3.IEC60664**