


ecoFLEX 32A Underfloor Power Distribution

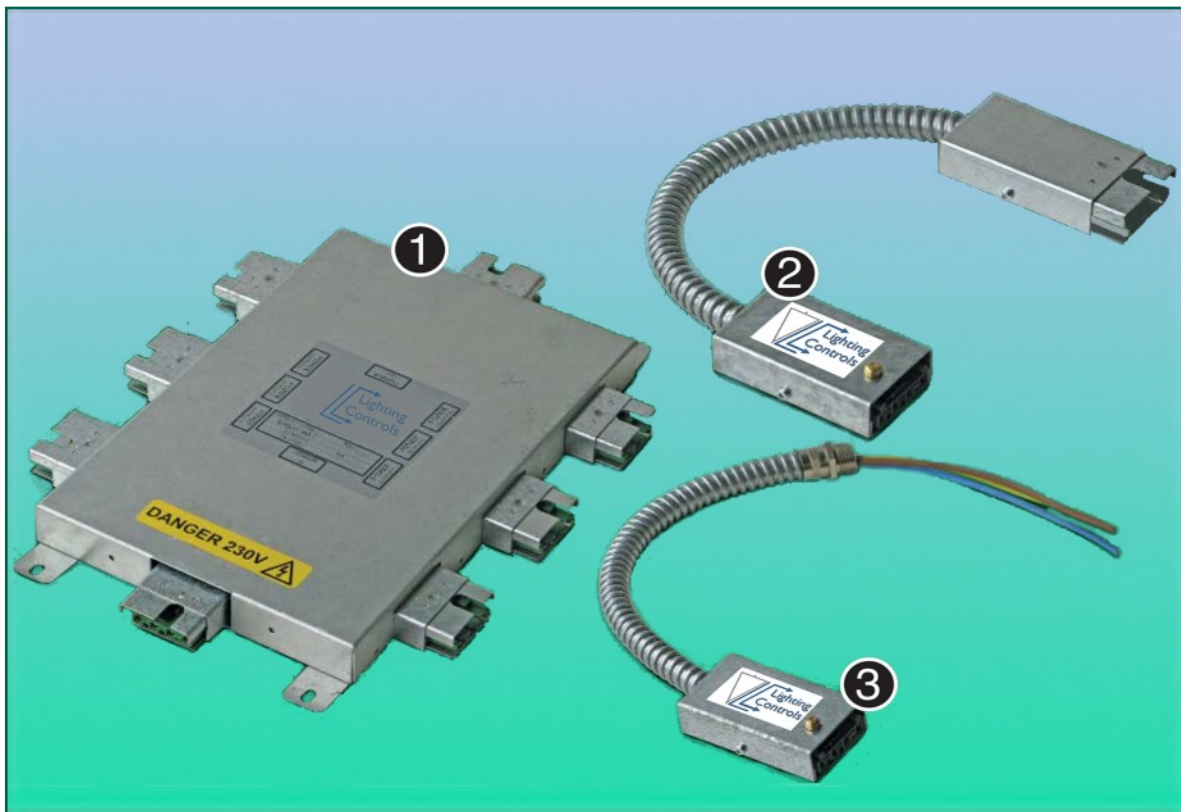


1. The **ecoFLEX** 6 Port Master Power Distribution unit (PDU) is supplied pre-wired with a home run cable or with a male and female 4 pole 32A connector. The male connection on the PDU is the incoming connection from the power supply lead with a female starter 3 or 4 core 4.0mm² BASEC approved BS7211 LSOH 6491B cable.

Similarly the connection between PDU's can be plug and socket or pre-glanded to custom lengths.

2. Power Interlink Cable 4 Pole

The **ecoFLEX** Armoured Power Interlink Cable provides power between two PDU's. Leads are supplied as a pre-wired male to female 4 pole 3 or 4 core LSOH cable and are typically supplied in custom lengths of 1 metre increments.

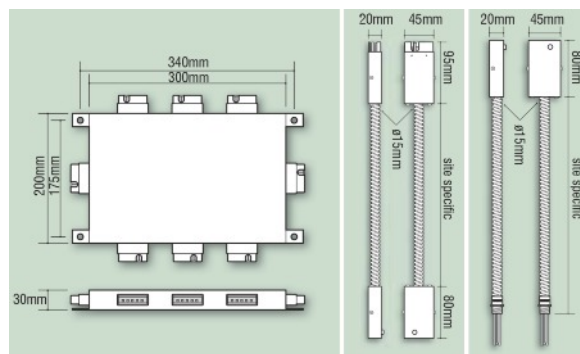

3. Armoured Power Tap Off

The **ecoFLEX** Armoured Tap Off is manufactured using flexible metal conduit and fully shrouded plugs. Each type of armoured tap off is available with up to 4 cores of LSOH cable. The leads are manufactured in custom lengths starting at 1 metre and increase in increments of 1 metre. For technical specifications please refer to the Technical Data for the Master Distribution Box.

Metal Housings: Bright Spangled Galv - BSEN10142:2000

Protection Class: IP20

Conduit: Galv - BSEN50086 **Current rating:** 25A **Voltage rating:** 400V/6kV/3.IEC60664

Manufactured to BS8488 and complies with Section 607.

IMPORTANT: The information contained in this data sheet is subject to change at any time without notice