

## Switched Fuse Spur




The **Switch Fuse Spur** provides a 13A protected supply to a fan coil unit via either a flexible conduit containing suitably sized LSF cables or a multi-core LSOH flexible cable. An integral bus can be provided within the conduit if required, but would make it a 5 pole system. Other fuse ratings are available.

The Armoured Switch Fuse Spur is connected via a 3 pole 25A male/female ported connection to allow for Interlink leads of various lengths to connect the Spurs back to a MDB. Typically you would expect there to be 10 FCU on a radial circuit from a port on the MDB.

The unit is connected via Interlink leads, please see datasheets for 3 pole Power Interlink Leads.

**Part No. IS-AWFS33101**

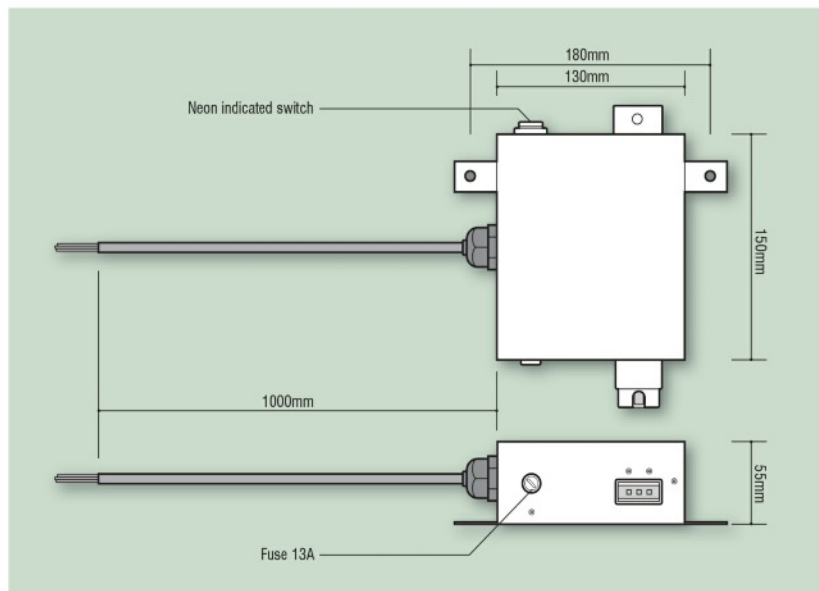

Metal Housings: **Bright Spangled Galv – BSEN10142:2000**  
 Conduit: **Galv – BSEN50086**      Current Rating: **25Amps**  
 Manufactured to: **BS8488**

Protection Class: **IP20**  
 Voltage Rating: **400V/6KV/3.IEC60664**